



every solution is **unique.**

WW4 Platform


Non-Refrigerated Water Recirculating Systems (Water-to-Water)

ww4 platform

Cooling Capacity	Determined by temperature and flow of building water. (Performance curve shown represents one possible solution. Contact Haskris for alternatives.)
Water Pump Capacity <small>alternatives available</small>	17 GPM (64.6 LPM)
Pump Motor HP	1.5
Reservoir Volume	30 Gallons (113 Liters)
Power Requirements ¹ <small>alternatives available</small>	208/230V-1Ø-60Hz 208/230V-3Ø-60Hz
Dimensions (W x D x H)	79 x 91 x 86 cm 31 x 36 x 34 in.
Shipping Weight	400 Lbs. (181 Kg)

• Unit specifications will change by adding certain options.

¹ Also available in 50Hz

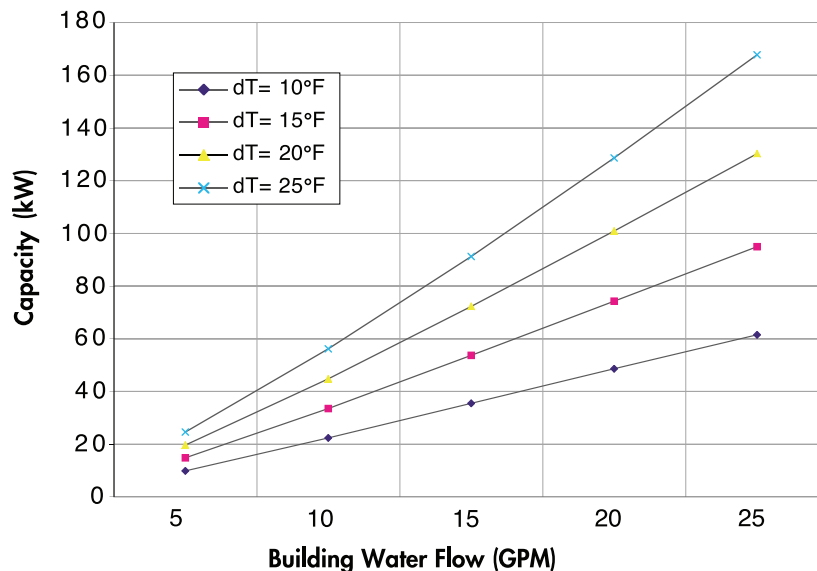

Haskris Company
100 Kelly Street
Elk Grove Village, Illinois
60007 USA

Phone: 001-847-956-6420
Fax: 001-847-956-6595

Email: sales@haskris.com

dT = Temperature differential between the building water and the supply water to your equipment.

BUILDING WATER = any source of cold water, including tap water or in-house chilled water.